Palm grip B 1

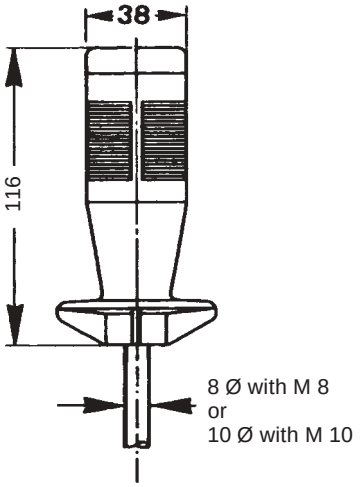

The palm grip B 1 is an actuating element for our multi-axis and single axis controller. It can also be used as an actuating element with hydraulic drives. Pushbuttons, rocker switches, e.t.c., can also be fitted to suit appropriate requirements. These devices have micro changeover contacts.

The palm grip has a highly flexible cable 4 (8) x 0,25 mm^2 x 450 mm long.

The mounting piece for the drive rod can be supplied with a tapped hole M 8 or M 10 (standard = M 10).

The palm grip B 1 is made of PPO plastic and is black in color.

Contact complement	**2 A**	**250 V**	**AC 15 /**	**3 A**	**24 V**	**DC 13**
or	**0,5 A**	**250 V**	**AC 15 /**	**1,5 A**	**24 V**	**DC 13**

Permissible ambient temperature	Operating -40°C to +60°C Storage -50°C to +80°C
Climate resistance	
Damp heat constant	DIN IEC 68 part 2-3
Damp heat cyclic	DIN IEC 68 part 2-30
Degree of protection front	IP 54 IEC 529 DIN 40050

Pos.			Contact-complement	Drawing No.	Type	Weight gramm	Price EURO
1		Without built in		KBAD / 22	B 1	100	
2 3 4		Rocker switch top tast-0-tast T - O - T Rocker switch top tast-0-rest T - O - R Rocker switch top rest-0-rest R - O - R	2 change over contacts 2A 250V AC 15	KBAD / 46	B 1 W	120	
5		Rocker switch top tast-0-tast T - O - T with Push button side	2 change over contacts 2A 250V AC 15 1 change over contact 0,5A 250V AC 15	KBAD / 49	B 1 WD	130	
6		Rocker switch top tast-0-tast T - O - T with 2 push button side	2 change over contacts 2A 250V AC 15 2 change over contacts 0,5A 250V AC 15	KBAD / 67	B 1 WDD	140	
7 8		Push button top with mechanical operation Push button top	1 change over contact 0,5A 250V AC 15	KBAD / 27 KBAD / 25	B 1 T B 1 D	120 100	
9 10		Push button top with 1 push button side Push button top with 2 push button side	2 change over contacts 0,5A 250V AC 15 3 change over contacts 0,5A 250V AC 15	KBAD / 47	B 1 DD B 1 DDD	120 130	
11 12 13		1 Push button side 2 Push button side 3 Push button side	change over contacts 0,5A 250V AC 15	KBAD / 50	B 1 D B 1 DD B 1 DDD	110 120 130	
14		Push button top with Rocker switch side tast-0-tast (protection IP 41) T-O-T	1 change over contact 0,5A 250V AC 15 2 change over contacts 0,5A 250V AC 15	KBAD / 75	B 1 DW	120	
15 16 17		Lever switch side 0-tast mechanical operation Lever switch side 0-tast 1 contact Lever switch side 0-tast 2 contacts	change over contacts 2A 250V AC 15	KBAD / 126 KBAD / 54	B 1 KT B 1 K B 1 KK	150 120 130	
21 22		Cable 4 res. 8 x 0,25 mm^2 x 450 mm long wired included Pos. 1-17 Additional price per metre cable 4-pole Additional price per metre cable 8-pole					